


NP-RFG20BB

Radial Flow Filter Cartridge

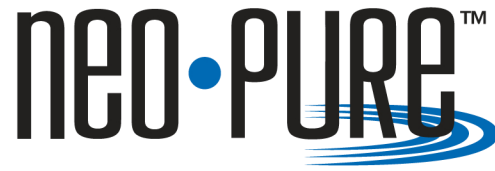

Contaminants Reduced:

- Chlorine Taste and Odor
- Dirt
- Rust
- Sediment



This NP-RFG20BB filter is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.

COMPONENT



Residential/Commercial Filtration Applications

Standard Features

- Manufactured in China
- Environmentally-friendly coconut shell granular activated carbon (GAC) filter
- Ideal for point-of-entry (POE) and other high flow rate application
- Compatible with Pentek® RFC20-BB, 155247-43, Watts® MAXRFL-FF20
- Drop-in cartridge style
- NSF 42 certified materials

Product Specifications

Filter Media

Coconut shell granular activated carbon (GAC)

Micron Rating (Nominal)

25 microns

Dimensions

4-1/2" dia. x 20"

Capacity

40,000 gallons

Operating Temperature

40 to 100 °F (4.4 to 37.8 °C)

Operating Pressure

30 to 100 psi

Maximum Flow Rate

6 gpm

Change Frequency

6 months

WARNING:

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.



2299 Ridge Rd., Greenville, SC 29607
Phone 888 - 859 - 1188 • Fax 864 - 284 - 1819