

Aqua-Pure®

Spec # _____

Quantity _____

Models:

AP801 / AP801-C

AP801T-C / AP801-1.5-C

Whole House Water Filters

Applications:

- Sediment & Rust
- Chlorine Taste & Odor

At a Glance:

- Unrestricted flow designed with 1" and 1-1/2" NPT connections
- Ideal for larger homes and commercial applications

Product Benefits:

- 1" and 1-1/2" inlet and outlet connections for easy installation and high flow rates
- Designed with built-in pressure relief for convenient cartridge change-out
- Accepts long-life, rigid AP800 Series sediment cartridges for high filtration efficiency and sediment capacity
- Accepts long-life carbon fiber block AP800 Series cartridges for efficient chlorine taste and odor reduction
- Installation kit included for Complete Series for easy and convenient installation
- Aqua-Grip filter wrench included for fast and easy housing sump removal for changing cartridges
- Manufactured from FDA CFR-21 compliant materials
- 10 Year Limited Warranty to help provide long-term operation, superior factory support and service



**AP801 / AP801-C /
AP801-1.5-C**


AP801T-C

Product Specifications:

Model No. (Part No.)	Inlet/ Outlet Size	Dimensions		Approx. Weight	Flow Rate	Temp. Range	Pressure Range	Std. Replacement Ctg. No.	Degree of Filtration
		Height	Diameter						
AP801 (55857-01)	1" NPT	13-15/16" (35.4 cm)	7-1/4" (18.4 cm)	5.5 lbs. (2.5 kg)	20 gpm (75.7 lpm)	40-100°F (4.4-37.8°C)	25-100 psi (172-689 kPa)	AP810 (not included)	5 micron nominal
AP801-C (55857-16)	1" NPT							AP810 (included)	
AP801T-C* (55857-26)	1" NPT								
AP801-1.5-C** (55857-17)	1-1/2" NPT				28 gpm (106.0 lpm)				

* "T" denotes transparent sump


** "C" denotes Complete Series, includes housing, bracket, wrench and AP810 cartridge

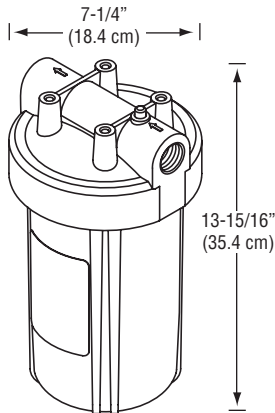

AP801 / AP801-C /
AP801T-C / AP801-1.5-C

Easy Installation:

CAUTION: Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

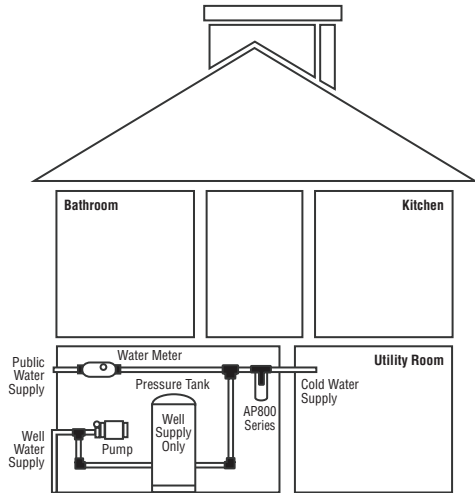

Spec # _____

Quantity _____

Model Number _____

Part Number _____

Physical Specifications:

- 1" and 1-1/2" NPT inlet and outlet ports
- System is a single vessel design
- System is manufactured from FDA CFR-21 compliant materials
- System has a maximum operating pressure of 100 psi (690 kPa) and operating temperature of 100°F (37.8°C)
- System comes with mounting bracket, wrench and AP810 cartridge
- System incorporates a pressure relief button

Replacement Cartridge Options

Sediment Model	Load	Nominal Micron Rating	Application			Max. Flow Rate
			Sediment/Rust	Chlorine Taste & Odor	Scale	
AP810	Normal	5	•			28 gpm (106 lpm)
AP811	Medium	25	•			28 gpm (106 lpm)
AP814	Heavy	50	•			28 gpm (106 lpm)
AP815		5		•		5 gpm (18 lpm)
AP817	Normal	5	•	•		10 gpm (38 lpm)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. **Change the filter cartridge at least every 6 months. Improper installation and maintenance may result in property damage due to water leakage.**

Limited Warranty:

CUNO Incorporated warrants that this product is free from defects in materials and workmanship. This limited warranty, together with any and all warranties implied by law, shall be limited to a period of ten (10) years from the date of original purchase. This limited warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by CUNO or failure to properly comply with these installation or cartridge change-out instructions. This limited warranty is subject to exclusions and limitations. Please refer to the Warranty Card provided with the product for details.

Distributed by: _____



CUNO Incorporated
400 Research Parkway
Meriden, CT 06450 U.S.A.
Toll Free: 1.800.222.7880
Worldwide: 203.237.5541
Fax: 203.238.8701

www.aquapure.com • www.cuno.com